

ALPHASORB™ WALL PANEL



DESCRIPTION

AlphaSorb™ Fabric Wrapped Wall Panels are your answer to your acoustical and aesthetic needs with their strong sound-absorbing performance, durability and eye-pleasing appearance. These panels are available in a wide variety of sizes, shapes and colors. They allow you to create an effective sound control treatment that is distinctly designed for your environment.

Standard color options are the Guilford of Maine Fabric FR701, Style 2100. Other designer fabrics are available upon request.

TECHNICAL CHARACTERISTICS


Sizing Custom Sizing up to 4' x 10'
 Thicknesses 1", 2"
 Colors Wide Variety, See Color Chart

FEATURES

- Class 1 Fire Rated
- NRC Ratings .85 to 1.15
- 6—7 lb. Per Cubic Foot Density
- Various Mounting Systems
- Options for Beveled, Mitered or Radius Edges

APPLICATIONS

- Houses of Worship
- Teleconferencing & Videoconferencing
- Classrooms
- Broadcast & Recording Studios
- Home Theaters
- Multipurpose Rooms

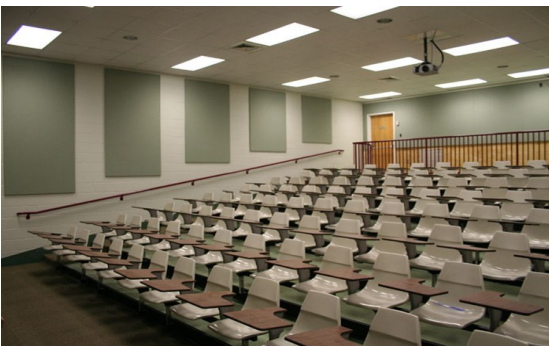

ALPHASORB™ WALL PANELS								
Octave Band Frequencies (Hz)	125	250	500	1000	2000	4000	NRC	
Sound Absorption Coefficient	1" Thick	.14	.27	.80	1.11	1.14	1.14	.85
	2" Thick	.22	.81	1.24	1.30	1.21	1.16	1.15

MOUNTING OPTIONS & EDGES		
Z-Clip Fasteners	Impaling Clip Fasteners	Velcro Fasteners Installed (Available on Sizes 4' x 5' or Smaller)
Chemically Hardened Edges	Radius, Mitered or Beveled Edges	Expedite Fee

