



Engage The Power of We™

Avaya Scopia® XT5000 Room System

Exceptional Experience, Extraordinary Power

Highlights

- Exceptional Experience
- Extraordinary Power
- Intuitive and Easy-to-Use
- Sleek and Elegant Design
- All-in-one Solution



The Avaya Scopia® XT5000 provides exceptional video, audio, and data quality along with ease-of-use designed to make users successful. The XT5000 incorporates dual 1080p/60fps live video and content, HD audio, simultaneous H.264 High Profile and Scalable Video Coding (SVC), and multi-party calling. The PTZ camera, supporting 1080p/60fps, offers 10x optical zoom (40x digital) and wide-angle capability for viewing details and an entire group.

The second video stream can be used with an additional camera or for high resolution 60fps data and content sharing. An embedded MCU with support for continuous presence with up to 9 participants is available. The advanced audio system delivers CD-quality, 20 kHz audio and includes a three-way beam forming digital microphone pod that isolates the speaker from noise. The user interface is designed for simplicity along with Apple iPad control for enhanced capabilities. The XT5000's refinement not only enhances the user experience but its modern hardware design complements any conference room.





H.264 High Profile and SVC, an embedded 9-way multi-party MCU, Apple iPad Multi-Touch control – all combine to make the XT5000 one of the most powerful conferencing systems ever created in its class.

Intuitive and Easy-to-Use

The Scopia XT5000 has been designed with the end user in mind. It delivers instant, intuitive and effective meeting control with little or no training required. With Microsoft Exchange calendar support, users can join meetings directly from the integrated system calendar. The advanced on-screen participants list gives leaders full meeting moderation. To further extend its user functionality, the system is also enabled for control via the Apple iPad device.

With more than 100 years as a leader in communications, Avaya can help your company maximize productivity with the communications solutions specific to the needs of your workforce.

Exceptional Experience

The Avaya Scopia XT5000 sets the standard for an exceptional conferencing experience. Simultaneous HD 1080p/60fps for live video and content and CD-quality, 20 kHz audio deliver an outstanding experience. H.264 High Profile provides ultimate bandwidth efficiency and H.264 Scalable Video Coding (SVC) offers high network error resiliency. The XT5000 delivers excellent performance in real-world network conditions.

Extraordinary Power

The Scopia XT5000 harnesses extraordinary power for the most demanding conferencing applications. Two full 1080p/60fps video channels,

Sleek and Elegant Design

The XT5000's refinement and polish go beyond the user experience to the sleek and elegant hardware design of the system. The XT5000 is a natural fit for today's businesses.

All-in-one Solution

The XT5000 is also offered as a unique all-in-one video conferencing solution combining its room system capabilities with embedded 9-way multi-party conferencing, Scopia Desktop conferencing, and firewall traversal. Additionally, participants can utilize Avaya Scopia Mobile to join video conferences via the latest mobile devices.

Avaya Scopia XT5000 Specifications

Communications

- IP: H.323, SIP (RFC 3261)
- ISDN¹ Supported through Scopia Gateway
- Bit rate: H.323, SIP: up to 6/12¹ Mbps; H.320: up to 2 Mbps
- MCU compatibility: H.243, H.231

Video²

- 2 simultaneous 1080p60 channels: camera + auxiliary camera¹ or camera + content
- H.263, H.263+, H.263++, H.264, H.264 High Profile, H.264 SVC
- Dual video: H.239 (H.323); BFCP (SIP)
- **HDMI input formats**
1920 x 1080p @ 25, 30, 50, 60fps
1280 x 720p @ 25, 30, 50, 60fps
720 x 576p @ 50fps
720 x 480p @ 60fps
640 x 480p @ 60fps
- **Live video encoding formats**
1920 x 1080p @ 25, 30, 50, 60fps
1280 x 720p @ 25, 30, 50, 60fps
1024 x 576p @ 25, 30fps: w576p
848 x 480p @ 25, 30fps: w480p
768 x 448p @ 25, 30fps: w448p
704 x 576p @ 25, 30fps: 4CIF
704 x 480p @ 25, 30fps: 4SIF
624 x 352p @ 25, 30fps: w352p
576 x 336p @ 25, 30fps
512 x 288p @ 25, 30fps: wCIF
416 x 240p @ 25, 30fps: w240p
400 x 224p @ 25, 30fps
352 x 288p @ 25, 30fps: CIF
352 x 240p @ 25, 30fps: SIF
- **DVI input formats**
1920 x 1080p @ 60fps
1600 x 900p @ 60fps (digital only)
1440 x 900p @ 60fps: WSXGA

1280 x 1024p @ 60, 75fps: SXGA
1280 x 960p @ 60, 85fps: SXGA
1280 x 768p @ 60fps: WXGA
1280 x 800p @ 60fps: WXGA
1280 x 720p @ 60fps
1024 x 768p @ 60, 70, 75 fps: XGA
800 x 600p @ 60, 72, 75fps: SVGA
640 x 480p @ 72, 75fps: VGA

• PC content encoding formats:

Up to 1080p @ 60fps

• HDMI output formats

1920 x 1080 @ 25, 30, 50, 60fps
1280 x 720 @ 50, 60fps

Camera

- Resolution: 1080p60fps
- Presets: 122
- Field of View (H): 8° - 70°
- PAN / Tilt: ± 100° / ± 25°
- Zoom: 10x optical, 4x digital, 40x total
- Far End Control: H.224, H.281

Recording

- Recording on USB key/disk (with dual display systems, both displays show the same images while recording; uses 2 ports of the 9 port MCU, no impact on 4 port MCU)
- USB disk formats: FAT32, EXT2, EXT3, EXT4
- Recording formats: MP4 file

Audio

- Acoustic echo cancellation
- Adaptive post filtering
- Audio error concealment
- Automatic Gain Control (AGC)
- Automatic noise suppression

• Frequency response:

G.711: 300 - 3,400 Hz
G.728: 50 - 3,400 Hz¹
G.729A: 50 - 3,400 Hz¹
G.722, G.722.1: 50 - 7,000 Hz
G.722.1 Annex C: 50 - 14,000 Hz
AAC-LD: 50 - 14,000 Hz
AAC-LC: 50 - 14,000 Hz
G.719: 50 - 20,000 Hz

Digital Microphone Array Pod

- 360° range
- Frequency response: 50 - 22,000 Hz
- Mute button
- Up to 2 cascaded pods

Audio/Video Interfaces

• Video inputs:

1 x HDMI
1 x DVI-I
3 x Additional HDMI¹

• Video outputs:

2 x HDMI for dual display

• Audio inputs:

1 x HDMI
1 x Microphone Array Pod (RJ-11)
1 x 3.5 mm (1/8") line in jack for audio source (analog / digital with mini-TOSLINK adapter)

• Audio outputs:

2 x HDMI
1 x 3.5 mm (1/8") line out jack (analog / digital with mini-TOSLINK adapter)

USB Ports²

- 1 x USB2
- 1 x USB3

Network Features

- IPv4 and IPv6 simultaneous support
- Auto Gatekeeper discovery
- QoS support: IP Precedence, IP Type of Service (ToS), Differentiated Services (diffserv)
- Avaya NetSense bandwidth adaptation for high quality over unmanaged networks
- DTMF tones: H.245, RFC2833
- SNTP date and time synchronization

• IP adaptive packet management

Flow control
Packet Loss based down-speeding
Packet Loss recovery policies

Network Protocols

- DHCP, DNS, HTTP, HTTPS, RTP/RTCP, SNTP, STUN, TCP/IP, TELNET, TFTP, 802.1Q, 802.1X

Scopia XT5000 Options

- Additional Premium Camera
- Scopia XT 3-way Microphone Array Pod
- Advanced Camera, 20x Optical Zoom, Ceiling Mount, 1080p30
- 4 HD Port Camera / Source Switch
- 4/9 Port Embedded 1080p30 MCU
- Scopia Desktop and Mobile Support
- Extended IP Bit Rate: Multipoint = 12 Mbps, P2P = 10/8 Mbps (SIP/H.323)
- Advanced Audio Codec Pack (G.728 and G.729A)
- Codec Wall Mount
- Camera Wall Mount

Support Services

Avaya offers complete support services to help maximize your video investment. Strategic and technical consulting along with deployment and customization services help ensure that video collaboration rollouts are successful and aligned to your business requirements.

Avaya Video Support Services maximize up time with software updates, upgrades, and remote maintenance.

About Avaya

Avaya is a leading, global provider of customer and team engagement solutions and services available in a variety of flexible on-premise and cloud deployment options. Avaya's fabric-based networking solutions help simplify and accelerate the deployment of business critical applications and services. For more information, please visit www.avaya.com.

Avaya Scopia XT5000 Specifications (cont.)

Network Interfaces

- 2 x 10/100/1000 Base-T full-duplex (RJ-45)
- "Keep Alive" packet time configurable

Firewall Traversal

- Auto NAT discovery HTTP and STUN
- H.460.18, H.460.19

Auxiliary Camera Interface

- VISCA RS232 for PTZ control (Mini-DIN 8-pin)

User Interface

- 24 language on-screen user interface
- Infrared remote control
- API for endpoint control
- Scopia Control application for Apple iPad
- Microsoft Exchange calendar integration

Directory Service & Address Book

- LDAP Client (H.350)
- Receive global address book from LDAP Server including Scopia Management

Multipoint Control Unit¹

- H.323, SIP and H.320 mixed mode
- 4 / 9 HD continuous presence participants
- Support for Scopia Desktop and Mobile¹
- Dial-in / Dial-out capabilities
- Encryption for up to 4 connected participants
- Automatic video layouts
- Dual-video from any site (H.323, H.320)

Security Features

- Embedded encryption³
- H.323 security per H.235v3/Annex D
- SIP security per SRTP and TLS, enciphering up to AES-256
- SIP "Digest" authentication (MD5)
- RTP media enciphering with AES-128
- Public-Key including Diffie-Hellman (1024 bits), RSA (up to 4096 bits)
- Cryptographic hash (up to SHA-512)
- Web access via HTTPS
- API access via SSH
- Selective enable / disable of IP features

Web Management

- Configuration, call, diagnostics and management functions are accessible with Internet Explorer 8.0+, Firefox 3.6+, Safari 5.0+, Chrome 11.0+, Opera 11+

Power Supply

- 100-240 VAC, 50-60 Hz, 2.5 A Max.

Physical Characteristics

• Horizontal / Vertical Mounting:

- W: 29 cm (11.4")
- D: 16.5 cm (6.5")
- H: 4 cm (1.6")
- Weight: 2.4 kg (5.3 lb)

• Camera / Optional Camera

- W: 25.0 cm (9.8")
- H: 15.2 cm (6.0")
- D: 13.5 cm (5.3")
- Weight: 1.6 kg (3.5 lb)


• Microphone Pod:

- W: 14.0 cm (5.5")
- Weight: 0.3 kg (0.7 lb)

¹ Optional.

² USB supports recording, firmware upgrade, USB to serial adapter for control, limited headsets and cameras (USB2 camera support).

³ Encryption is subject to local regulations and in some countries is restricted or limited. Please contact your Avaya representative for details.

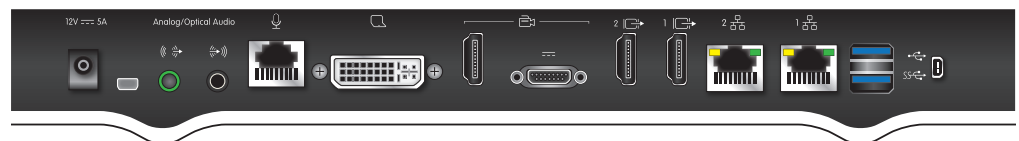

Learn More

For additional information, or for an Avaya Scopia demonstration, contact your Avaya Account Manager or Avaya Authorized Partner or visit us at: www.avaya.com.

